


HS SERIES HAGANATOR DECUMULATOR MOBILE CONCRETE BATCH PLANT





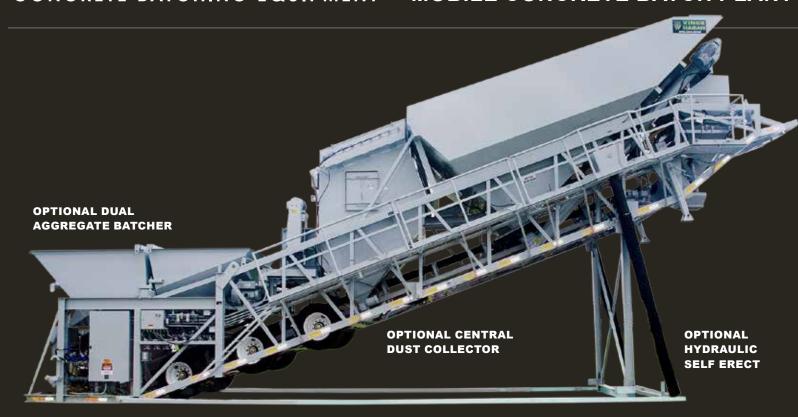

- PATENTED TRUSS FRAME TRAVELS AS ONE LOAD OF FREIGHT
- AGGREGATE BATCHER CHARGED BY FRONT END LOADER
- NO CRANES NEEDED WITH AVAILABLE HYDRAULIC SELF ERECT
- SETS UP ON STEEL PLATES OR WOODEN CRANE MATS
 CONCRETE FOUNDATION NOT REQUIRED IN MOST SITUATIONS
- IN-TRUSS DUST COLLECTION AVAILABLE
- MANUAL OR AUTOMATED BATCHING CONTROLS
- 40 80 CUBIC YARDS PER HOUR

ROOM TO GROW

FUTURE UPGRADES HS SERIES CONCRETE BATCH PLANT





Optional Model HM Horizontal Central Mixer can be retrofitted for wet batch.

HS OPTIONS

- · Two independent aggregate batchers
- Single or twin 7", 10" or 12" screw feeders
- · 3" Water Pump
- Larger Air Compressors
- 24", 30" or 36" wide transfer belt
- 200, 300, 365, 400 BBL cement silo
- · Split cement silo
- Silo top or central in-truss dust collection
- Overhead aggregate bin (35, 45, 65, 80 or 100 tons)
- HCA auxiliary cement silo(s) 300 or 400 BBL
- · Automation: various choices available
- Sacked cement silo charging system



Optional portable conveyors to direct feed aggregate batcher to increase concrete production.



















P.O. Box 655141 Dallas, Texas 75265-5141 Sales@VinceHagan.com

1.800.354.3238 or 214.330.4601 WWW.VINCEHAGAN.COM

HS SERIES



HAGANATOR "HS" SERIES DECUMULATOR SPECIFICATIONS		
Standard Model HS	HS-12400B	Optional Equipment
Two Compartment Aggregate Batcher	12 cu. yds. total 20K load cells	2 Individual Agg. Batchers 12 cu. yds. total
Batch Transfer Belt Conveyor	30" x 43' @ 380 fpm	24" & 36"
Cement Silo	400 bbl. / 1600 cu. ft.	200 • 300 • 365 BBL
Cement Screw Feeders	Twin 10" multi-flight, 20hp, 100 cfm	Single 7" • 10" • 12" Twin 7" • 10" • 12"
Cement Batcher	12 yd. / 111 cu. ft. 3.0K load cells	12 yd. / 122 cu. ft. 3.0K load cells
Cement Batcher Discharge	10" butterfly valve	8" butterfly valve
Water Meter, electric	3" system	2" system
Air Compressor	15hp with 120 gallon tank, 50.5 cfm	10hp • 20hp • 25hp
Batching Controls	Manual Push Button	Computer Automated
Electrical (pre-wired in EMT conduit & UL Listed)	460V/3PH/60HZ	230V/3PH/60HZ
Motors (electric)	TEFC	TEFC
Mobile Chassis	Truss design, 10'-0" wide dual axles with dual 11R x 22.5 radial tires and air brakes	Truss design, 10'-0" wide triple axle with dual 11R x 22.5 radial tires and air brakes

HYDRAULIC SELF ERECT OPTION

ELIMINATES THE NEED & COST OF CRANES - FAST & EASY SET UP IN REMOTE LOCATIONS








THE HS SERIES ELIMINATES THE NEED FOR AGGREGATE CONVEYORS AND TRAVELS AS ONE LOAD OF FREIGHT

The HS mobile plant is the perfect choice for on-site projects that require production of 40 to 80 cubic yards per hour. This unit has a patented truss frame design and travels as one piece with axle(s) and 5th wheel towing assembly. The unit includes a one or two compartment decumulative aggregate batcher, single compartment accumulative cement batcher, batch transfer belt, one or two compartment intruss silo with twin screw feeders, optional in-truss dust collection system, water system, complete air system and pre-wired electrical in EMT conduit to NES (National Electric Standards) all on one truss frame. With the available electric or gasoline powered hydraulic self erect option, there is no need for any other equipment (except for power) to set up and start batching concrete.

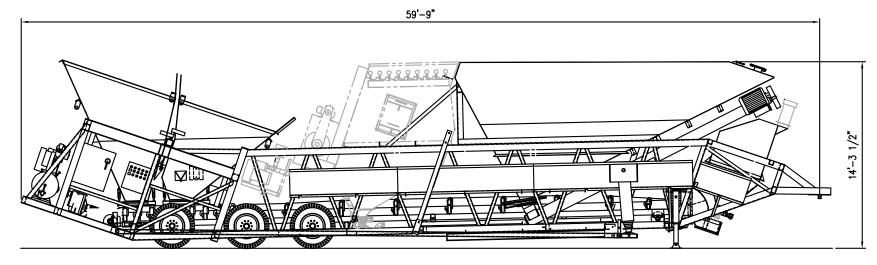

TRAVEL POSITION

